



特性 FEATURES :

- * 5 x 20mm ガラス管・速断タイプ
Glass Tube, Fast-Acting Type (Normal Blow)
- * RoHS 適合品 RoHS-Compliant Products

規格承認 APPROVALS :


- * UL 承認 UL Listed [100mA-2.5A 125V/250V] [3-8A 125V]
- * UL 構成部品プログラム承認 UL Recognized [3-8A 250V]
- * CSA 承認 [32mA-8A 125V/250V]
- * METI (PSE) 承認 [1A-15A 125V/250V]
- * KC (Korean Certification) 韓国安全認証 [100mA-7A 250V]



51NM/52NM SERIES


寸法 DIMENSIONS :

51NM



52NM

51NM(P)

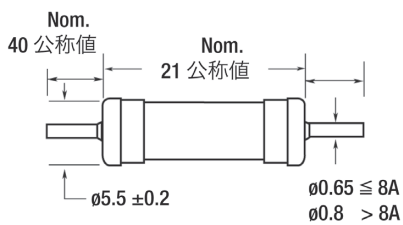


単位 Unit : mm

電気的特性 ELECTRICAL CHARACTERISTICS :

電流値 % of Ampere Rating	溶断時間 Opening Time
100%	4 時間最小 hours Min.
135%	1 時間最大 hour Max.
200%	5 秒最大 sec Max.

溶断曲線 AVERAGE TIME-CURRENT CURVES :

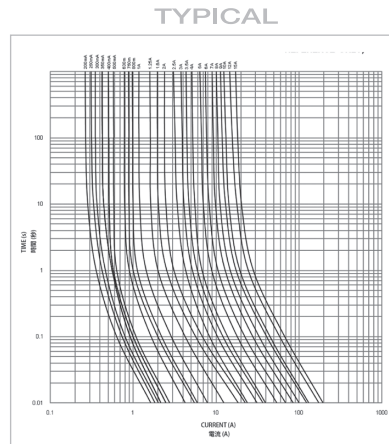

仕様 SPECIFICATIONS :

品名 Product Code	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L	Typical I ² t 値 10 In Pre-Arcing I ² t at 10 In (A ² sec)	品名 Product Code	電流値 Ampere Rating	電圧値 (VAC) Voltage Rating H / L	Typical I ² t 値 10 In Melting I ² t at 10 In (A ² sec)
51NM / 52NM 0200H/L	200mA	250V / 125V	0.02697	51NM / 52NM 016H/L	1.6 A	250V / 125V	3.450
51NM / 52NM 0250H/L	250mA	250V / 125V	0.03371	51NM / 52NM 020H/L	2 A	250V / 125V	5.149
51NM / 52NM 0300H/L	300mA	250V / 125V	0.04045	51NM / 52NM 025H/L	2.5 A	250V / 125V	5.761
51NM / 52NM 0315H/L	315mA	250V / 125V	0.04247	51NM / 52NM 030H/L	3 A	250V / 125V	9.722
51NM / 52NM 0350H/L	350mA	250V / 125V	0.04719	51NM / 52NM 032H/L	3.15 A	250V / 125V	9.835
51NM / 52NM 0400H/L	400mA	250V / 125V	0.06145	51NM / 52NM 035H/L	3.5 A	250V / 125V	13.52
51NM / 52NM 0500H/L	500mA	250V / 125V	0.07681	51NM / 52NM 040H/L	4 A	250V / 125V	15.80
51NM / 52NM 0600H/L	600mA	250V / 125V	0.1224	51NM / 52NM 050H/L	5 A	250V / 125V	29.11
51NM / 52NM 0630H/L	630mA	250V / 125V	0.1790	51NM / 52NM 060H/L	6 A	250V / 125V	47.42
51NM / 52NM 0700H/L	700mA	250V / 125V	TBA	51NM / 52NM 063H/L	6.3 A	250V / 125V	59.24
51NM / 52NM 0750H/L	750mA	250V / 125V	0.3040	51NM / 52NM 070H/L	7 A	250V / 125V	73.10
51NM / 52NM 0800H/L	800mA	250V / 125V	0.3550	51NM / 52NM 080H/L	8 A	250V / 125V	100.0
51NM / 52NM 010H/L	1 A	250V / 125V	0.6167	51NM / 52NM 090H/L	9 A	250V / 125V	153.9
51NM / 52NM 012H/L	1.2 A	250V / 125V	1.400	51NM / 52NM 100H/L	10 A	250V / 125V	171.0
51NM / 52NM 013H/L	1.25 A	250V / 125V	1.540	51NM / 52NM 120H/L	12 A	250V / 125V	306.2
51NM / 52NM 015H/L	1.5 A	250V / 125V	2.076	51NM / 52NM 150H/L	15 A	250V / 125V	382.8

* 定格電圧 Voltage Rating : H - 250VAC / L - 125VAC

* 遮断定格 Interrupting Rating : 10,000A
(UL/CSA)

35A	125VAC (32mA-8A)
100A	250VAC (32mA-1A)
100A	250VAC (1.2A-3.5A)
200A	250VAC (4A-8A)

Rated Breaking Capacity

* 定格遮断電流 : 100A 125VAC (51NM: 1-15A)
(電安 PSE) 500A 125VAC (52NM/51NM(P): 1-15A)
100A 250VAC (51NM/52NM/51NM(P): 1A-15A)
(韓国 KC) 100A 250VAC (100mA-7A)